Kebony Norge AS +47 06125 www.kebony.com info@kebony.com

Kebony Clear

Kebony Clear RAP rough sawn


32 x 100 mm

Product description

Kebony Clear Radiata products are produced from FSC® certified Radiata Pine modified with a bio-based liquid.


The patented Kebony technology permanently alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning.

Rough sawn Kebony Clear Radiata products are 3-sides clear and are treated through the board.

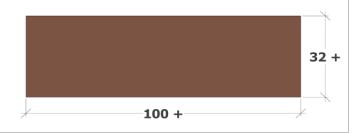

Quality and appearance upon delivery

| Profile | Rough |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | 32 x 100 mm * |
| Standard length(s) | - |
| Knots/Pitch pockets | Maybe visible and are a natural occurrence in wood |
| Cupping | Max 2 % of width |
| Crook | 3-3,6 m: max 10 mm; 4,2-4,8 m: max 13 mm |
| Moisture | 4-8 % ** |
| Cracks | Surface cracks and checks maybe visible |
| Wane | Maybe visible on rough sawn products |
| NOTE | If machining reveals surface areas significantly paler in colour, that board, or the affected portion of the board, shall be discarded if the width of the pale area is more than 3 cm. Such areas may be insufficiently treated, and may therefore fail to meet Kebony's durability criteria. |



The Kebony process can result in sticker marks on rough sawn materials. Sticker marks will be reduced by milling most of the profile on the appearance side.

^{**} Moisture equals to 7-10 % of untreated wood

| Technical data (average values) | Kebony | Untreated | Unit |
|--------------------------------------------------|--------|-----------|----------------------|
| Density (12 % mc) | 670 | 480 | Kg/m ³ |
| Hardness (EN 1534) | 4,2 | 2,5 | Brinell |
| Max swelling (dry to wet, tangential direction) | 4 | 8 | % |
| Decay resistance (EN 350) | 1 | 5 | Durability class 1-5 |
| Use class (EN 335) | 3* | 1** | |
| * Suitable for outdoor applications above ground | | | |

NEW WOOD

** Not suitable for outdoor applications

Documents / Certificates / ComplianceInformation Sheet: Health Safety and Environment - www.kebony.com FSC CU-COC-813689 - www.fsc.org

FSC CU-COC-813689 - www.fsc.org Nordic Ecolabel 2086 0001 - www.nordic-ecolabel.org EPD: NEPD-407-287-EN – www.epd-norge.no Complies with EU Timber Regulation (EUTR)









WEATHERED

Environment

Kebony products are exempted from the EU's biocide directive (76/769/EEC). Waste handling as ordinary wood.

Disclaimer

Kebony products will change in appearance when exposed to rain and sun. Colour changes and surface cracks will occur due to natural weathering. The manufacturer cannot be held liable for any such variations in colour and surface appearance. This will not influence durability and overall performance of the product.

This data sheet applies for the original profile – any alterations may influence the technical performance of the product. Kebony cannot be held liable for internal defects revealed upon further processing.

Kebony is continuously working on product development. Information in this datasheet may be changed without further notice.

^{*} Width and thickness are nominal measures. Actual dimension can be slightly larger.